

UV/Visible Spot Curing System

OmniCure® S2000

The OmniCure® S2000
UV/Visible Spot Curing System
is the most intelligent system
of its kind

Powerful 200 Watt Intelli-Lamp® with a guaranteed
lamp life of 2000 hours

Maximum trigger shutter activation latency of only
50ms in Programmable Logic Controller (PLC) mode

Convenient, downloadable StepCure® software without
the requirement of an external Desktop PC

Repeatable cures with Closed-Loop Feedback technology
for even the most advanced assembly process

Optional OmniCure® R2000 Radiometer can be combined
to calibrate and set absolute irradiance levels from a single
reference point



The OmniCure® S2000

The OmniCure® Advantage In Spot Curing Systems

Recognized as the global leader in bonding systems for precision assembly with light-cured adhesives, the OmniCure® S2000 provides the power, control and repeatability required for high-speed automated manufacturing assembly. Offering a powerful 200 Watt lamp with a guaranteed life of 2000 hours, the OmniCure® S2000 also offers Closed-Loop Feedback technology and a flexible PC software interface for computer-controlled operation. When combined with OmniCure®'s R2000 Radiometer, the OmniCure® S2000's precision and reliability is unmatched. The OmniCure® S2000 is also designed to adhere to regulatory validations and is RoHS compliant.

Fast Shutter Activation

The OmniCure® S2000 is equipped with a fast shutter activation time, providing a maximum trigger shutter activation latency of only 50ms in PLC mode.

Downloadable StepCure®



StepCure® software can download a customized multi-phase cure profile directly to the system. Previously only available when connected to an external Desktop PC, this option offers users greater cure control.

200 Watt Intelli-Lamp®

The powerful 200 Watt Intelli-Lamp® provides even faster curing with high UVA irradiance of up to 10W/cm². With automatic lamp hour tracking and broad spectral output, OmniCure®'s patented technology makes the OmniCure® S2000 suitable for a wide range of adhesive/substrate bonding applications.

Closed-Loop Feedback

Over time, lamp intensity diminishes effective curing. The OmniCure® S2000 internal intensity sensor monitors light output in real time and opens the iris to automatically correct light output within +/-5%, ensuring repeatable and measurable doses of energy every time.



Intelligent Automation



Easily integrated into automated systems, the OmniCure® S2000 is ideal for automated processes, minimizing development time. The system can be programmed and controlled externally from a PLC, with or without an external dongle. PC software and commands are included with the system.



Expanding Your Options

Light Delivery


To accommodate the various needs of its' customers, the OmniCure® S2000 is adaptable to four different light guide options. Ideally used with a multi-legged High Power Fiber Light Guide to cure multiple sites with a single light source, Single-Legged, Liquid-Filled and Fiber Light Guides are also available.



Optional Accessory:
OmniCure® R2000 Radiometer



1. High Power Fiber Light Guide
2. Liquid Light Guide
3. High Power Fiber Light Line

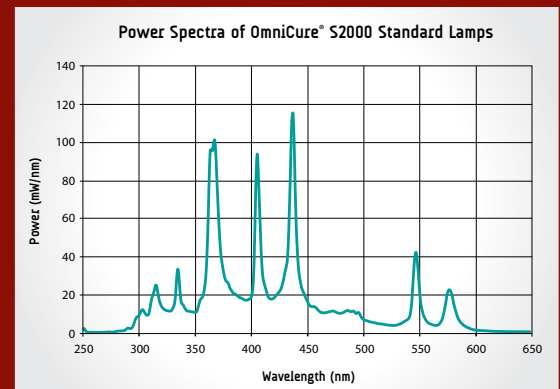

Flexible Spectral Output

The broad spectral output makes the OmniCure® S2000 ideal for a wide range of applications. Selectable bandpass filters allow you to customize the light for your specific application.

FEATURES	BENEFITS
Faster Shutter Activation Time	70% improvement of shutter activation latency increasing productivity, especially for high volume manufacturing
Downloadable StepCure® Software	Download customized multi-phase cure profiles directly to the unit. No need for a permanently connected PC
Modified PLC Level Mode	Provides trigger signal versatility by selecting either edge or level modes
200W lamp technology with up to 30W/cm ² of output and a 2000 hour lamp life guarantee	Lower operating costs
Intelli-Lamp® Technology to cool lamp and monitor lamp hours	Maintain optimum operating condition, stable lamp output, longer lamp life, accumulated lamp hours
2 Lamp Options	Special lamp technology for acrylic adhesives provides a tack-free surface cure
Closed-Loop Feedback Technology	Automatically maintains a constant output for a repeatable curing process
External PC Controlled	Beneficial for automated assembly processes
Adjustable light output in 1% increments	Allowing very precise control of output
Easily combined with the OmniCure® R2000 Radiometer	Calibrate and set absolute irradiance levels wirelessly from a single reference point

DESCRIPTION	
Lamp	High Pressure 200 Watt Mercury Vapor Short Arc
Lamp Life	2000 hours (guaranteed)
Available Filters	Standard: 320-500nm Optional: 250-450nm*, 365nm, 320-390nm, 400-500nm
Panel Controls	Power On/Off, Display Mode, Adjust Up/Down, Start/Stop, Lock/Unlock
Panel Displays	Accumulated lamp usage, Exposure time (0.2 - 999.9sec), iris setting (0-100%) / irradiance level (0.2W/cm ² - 40W/cm ²), lamp on/warm-up, shutter open, calibrated, Light Guide detection, shutter/lamp error
Warm-up Period	4-minutes (typical)
Power In	100-120VAC / 200-240VAC, 50/60Hz
Power Supply	High efficiency, switch mode, line isolated

GENERAL SPECIFICATIONS	
Dimensions (LxWxH)	13.3" x 7.1" x 7.9" (33.8cm x 18.0cm x 20.1cm)
Weight	9.9lbs (4.5kg)
Includes	Lamp Module, Selected Filter (installed), Protective Eyewear, Grounded and Shielded Power Cord, Foot Pedal, Manual
Warranty	1 year (excluding Lamp and Light Guide)

* Blank filter; must be used with Fiber or Extended Range Light Guide



2260 Argentia Road,
Mississauga, Ontario,
L5N 6H7 CANADA

www.LDGI-OmniCure.com

Telephone: +1 905 821-2600
Toll Free (USA and Canada): +1 800 668-8752
Facsimile: +1 905 821-2055

OmniCure@LDGI.com



PLEASE NOTE: Hg-LAMP CONTAINS MERCURY, Manage in Accord with Disposal Laws, See: www.lamprecycle.org or 1-800-668-8752
For a detailed look at our application solutions visit: www.LDGI-OmniCure.com/applications.php

Lumen Dynamics Group Inc. is certified under the globally recognized ISO 9001 Quality Management System and the ISO 14001 Environmental Management System. Our global customers can trust that Lumen Dynamics strives to be the best possible supplier in all aspects of our business.

OmniCure®, StepCure® and Intelli-Lamp® are registered trademarks of Lumen Dynamics Group Inc. All rights reserved. Lumen Dynamics has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation.

Contact Lumen Dynamics for prices and availability or to obtain the phone number of your local Lumen Dynamics representative. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language in any form by any means without the prior written consent of Lumen Dynamics Group Inc.