

EPO-TEK®

World Class LED Adhesives

Heat Sink Attach Electrically & Thermally Conductive


- EK1000
- EK1000-1
- EK1000-1-D
- EK2000
- H20E
- H20E-D

Heat Sink Attach Thermally Conductive

- 930-4
- H70E
- T7109
- T905BN-3
- T905BN-4
- TD1001

Die Attach Electrically & Thermally Conductive

- EK1000
- EK1000-1
- EK1000-1-D
- EK2000
- H20E
- H20E-D

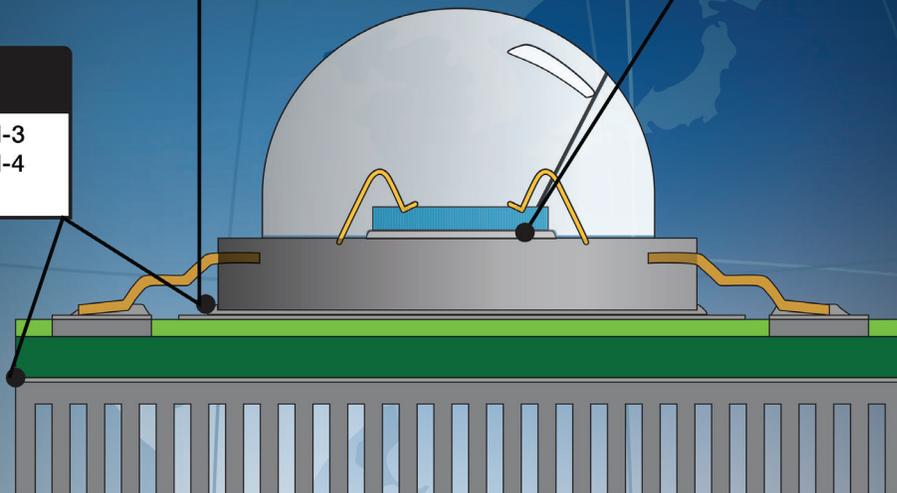


© Epoxy Technology Inc.

- Unsurpassed Thermal and Electrical Management
- Proven Quality and Reliability

EPOXY
* TECHNOLOGY

epotek.com

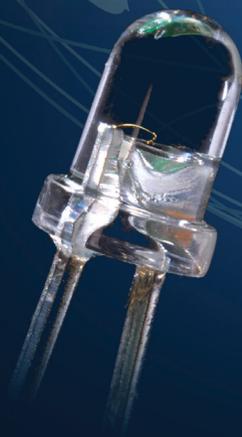

Die Attach



Electrically and Thermally Conductive

EPO-TEK®	Cure Temperature (minimal)	Viscosity @ 23°C (cPs)	Volume Resistivity (ohm-cm)	Thermal Conductivity (W/m ² K)	Performance Features
EK1000 EK2000	200°C - 30 min	1,800 - 3,600 @ 100 rpm	<0.00009	12.6 (150°C/1hr cure) 26.3 (200°C/1hr post-cure)	Adhesive exhibiting exceptional thermal and electrical conductivity. Ideal for high power LEDs.
EK1000-1	200°C - 30 min	13,000 - 21,000 @ 100 rpm	≤0.0007	12.1 (150°C/1hr cure) 22.7 (200°C/1hr post-cure)	Longer dry time than EK1000. Designed for applications requiring longer working time.
EK1000-1-D	200°C - 30 min	2,200 @ 100 rpm	≤0.00008	12.1 (150°C/1hr cure) 22.7 (200°C/1hr post-cure)	Lower viscosity than EK1000. Designed for application requiring longer working time and better flowing.
H20E	150°C - 5 min	2,200 - 3,200 @ 100 rpm	≤0.0004	2.5 (150°C/1hr cure)	Adhesive with proven reliability in low power LEDs.
H20E-D	175°C - 45 sec	1,400 - 1,900 @ 100 rpm	0.0004	3.26 (150°C/1hr cure)	Silver-filled epoxy with a smooth thixotropic consistency. Designed for applications requiring enhanced dispensability.

Heat Sink Attach

Electrically and Thermally Conductive

EPO-TEK®	Cure Temperature (minimal)	Viscosity @ 23°C (cPs)	Volume Resistivity (ohm-cm)	Thermal Conductivity (W/m ² K)	Performance Features
EK1000 EK2000	200°C - 30 min	1,800 - 3,600 @ 100 rpm	<0.00009	12.6 (150°C/1hr cure) 26.3 (200°C/1hr post-cure)	Adhesive exhibiting exceptional thermal and electrical conductivity. Ideal for high power LEDs.
EK1000-1	200°C - 30 min	13,000 - 21,000 @ 100 rpm	≤0.0007	12.1 (150°C/1hr cure) 22.7 (200°C/1hr post-cure)	Longer dry time than EK1000. Designed for applications requiring longer working time.
EK1000-1-D	200°C - 30 min	2,200 @ 100 rpm	≤0.00008	12.1 (150°C/1hr cure) 22.7 (200°C/1hr post-cure)	Lower viscosity than EK1000. Designed for application requiring longer working time and better flowing.
H20E	150°C - 5 min	2,200 - 3,200 @ 100 rpm	≤0.0004	2.5 (150°C/1hr cure)	Adhesive with proven reliability in low power LEDs.
H20E-D	175°C - 45 sec	1,400 - 1,900 @ 100 rpm	0.0004	3.26 (150°C/1hr cure)	Silver-filled epoxy with a smooth thixotropic consistency. Designed for applications requiring enhanced dispensability.

Thermally Conductive

930-4	150°C - 10 min 80°C - 6 hours	12,000 - 17,000 @ 20 rpm	≥2 x 10 ¹³	1.7 (150°C/1hr cure)	Adhesive providing excellent heat dissipation and insulating properties.
H70E	175°C - 1 min 80°C - 90 min	4,000 - 7,000 @ 50 rpm	≥1 x 10 ¹³	0.9 (150°C/1hr cure)	Fast curing adhesive recommended for thermal management applications.
T7109	150°C - 10 min 80°C - 8 hours	14,000 - 20,000 @ 20 rpm	≥8 x 10 ¹²	0.7 (40 mil) (150°C/1hr cure) 1.5 (3 mil) (150°C/1hr cure)	Low stress adhesive designed for large bond area die attach and heat sinking applications.
T905BN-3	80°C - 2 hours	2,000 - 7,000 @ 50 rpm	3 x 10 ¹¹	2.0	Adhesive with high thermal conductivity designed for heat sinking and encapsulation.
T905BN-4	80°C - 1 hour 23°C - 1 day	12,000 - 18,000 @ 20 rpm	≥4 x 10 ¹⁴	1.8	Room temperature curing adhesive with pure white color for easy inspection.
TD1001	125°C - 1 hour	10,000 - 22,000 @ 5 rpm	≥2 x 10 ¹³	0.8	White adhesive with low T _g and long pot life for low stress packaging.



Please consult our *Application Experts* at Epoxy Technology to find the most suitable adhesives for specific technical challenges at: techserv@epotek.com.



Epoxy Technology Inc. • 14 Fortune Drive • Billerica, MA 01821
phone 978-667-3805 fax 978-663-9782 techserv@epotek.com
www.epotek.com

EPO-TEK® is a registered trademark of Epoxy Technology Inc.
DISCLAIMER: Data presented should only to be used as a guide. Properties listed are typical, average values, based on tests believed to be accurate. It is recommended that users perform a thorough evaluation for any application based on their specific requirements. Epoxy Technology makes no warranties (expressed or implied) and assumes no responsibility in connection with the use or inability to use these products.